


MODEL No.	DESCRIPTION:
5400	Smoke Flameless Expulsion Canister Grenade
5420	CN Flameless Expulsion Canister Grenade
5430	CS Flameless Expulsion Canister Grenade
5440	OC Flameless Expulsion Canister Grenade
Revision D 5/17	

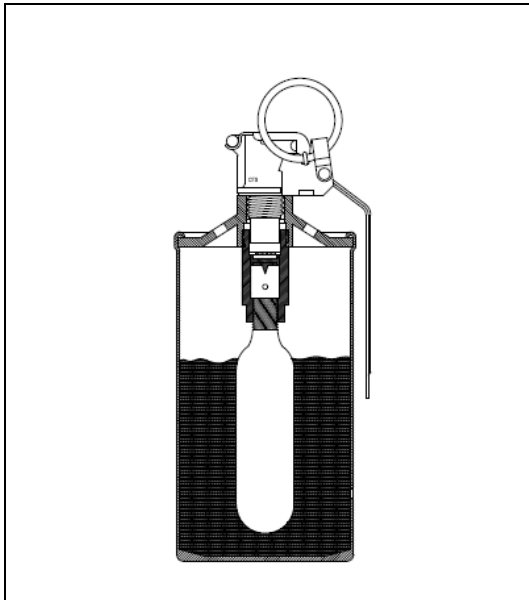

NOT TO SCALE

WARNING: CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

PHYSICAL & OPERATIONAL	
Type	Irritant Non-Pyrotechnic Grenade
Diameter	2.60" (66 mm)
Length	6.20 " (157 mm)
Fuze Type	Model 201
Fuze Delay	1.5 +/- 0.3 sec. Average
Launchable	Yes
Overall Weight	335 gm
Discharge Time	Instantaneous
Emission Ports	2
Warranty	5 Years From Date of Manufacture
<p>All specifications are average and are subject to change without notice.</p> <p>All performance specifications are based on testing conducted in Jamestown, PA USA, At an elevation of 1,058 feet above sea level at ambient temperature condition</p>	

SHIPPING INFORMATION	
Proper Shipping Name	Ammunition, Tear Producing
UN Number	Model 5400 – 0303 Models 5420,5430,5440 - 0301
Hazard Class	1.4 G (6.1,8)
Labels Required	1.4 G
Quantity Per Package	24
Total Package Weight	26 lbs.
Package Type	UN Specification 1A2/Y36/S Metal Drum with Lever Lock Lid
Package Dimensions	19 x12 (7 gal. drum) Also used for overnight Packages
Net Explosive Weight	0.9 gm per unit

CAUTION: The 5400 Series Grenade expels its powder payload rapidly and may produce sudden erratic movement of the device.