


MODEL No.	DESCRIPTION:
4090-1	40MM Aerial Flash-Bang, 100 Meter Warning Signal
	Revision B 5/17

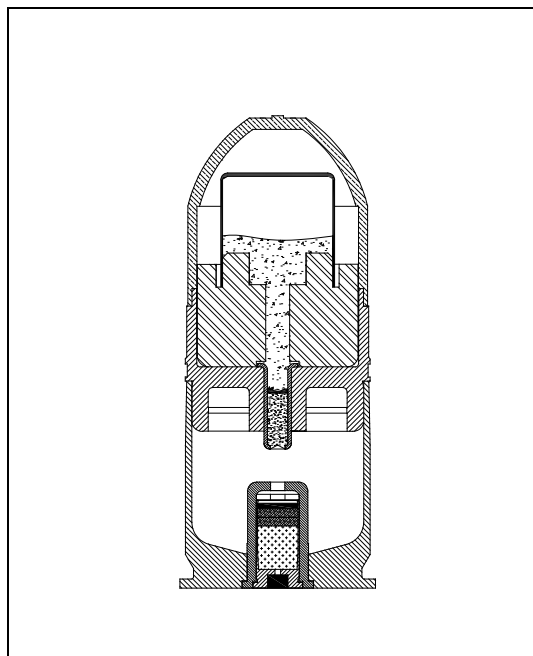

NOT TO SCALE

PHYSICAL & OPERATIONAL	
Type	Aerial Flash-Bangs
Caliber	40MM
Weapon Compatibility	All 40MM Launchers, M203, M79 and Multi-Launcher Type
Cartridge Length	4.1" (104 mm)
Effective Range*	100 Meters
Sound Output	165-175 dB Average
Light Output	6 Million Candela Minimum
Terminal Effects	Explosion and Bright Flash
Warranty	5 Years from Shipment Date
<p>All specifications are average and are subject to change without notice. All performance specifications are based on testing conducted in Jamestown, PA USA, At an elevation of 1,058 feet above sea level at ambient temperature conditions.</p>	

WARNING: CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

SHIPPING INFORMATION	
Proper Shipping Name	Cartridges for Weapons
UN Number	0412
Hazard Class	1.4E
Labels Required	Explosive 1.4E
Quantity Per Package	24 Cartridges
Total Package Weight	10 lb.
Package Type	4G Fiberboard Box
Package Dimensions	12 1/8" x 8 1/4" x 5 5/8" Height
Net Explosive Weight	4.40gm per unit

*Effective ranges may vary depending on the type of 40MM launcher, condition of the rifling, barrel length, and environmental conditions.

CAUTION: Do not fire this round directly at a crowd, or individual person. The Model 4090-1 should be fired at least 50' (15 M) above any human subjects. Do not fire directly into any building.