PRODUCT SPECIFICATIONS

MODEL No.	DESCRIPTION:
M6210HC	Hexachloroethane (HC) Smoke
	Revision C 7/18

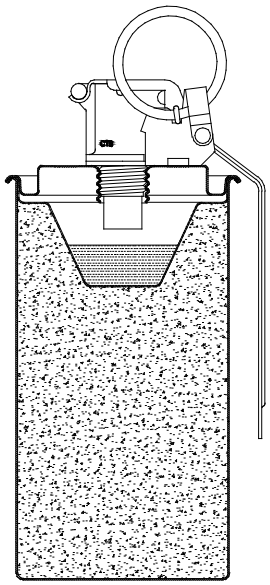

NOT TO SCALE

WARNING: CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

PHYSICAL & OPERATIONAL	
Type	Irritant & Smoke Pyrotechnic Grenades
Diameter	2.35” (60 mm)
Length	5.5” (140 mm)
Fuze Type	Model 201
Fuze Delay	1.5 +/- 0.3 sec. Average
Launchable	No
Overall Weight	685 gm
Discharge Time	1.5-2.5 Minutes
Emission Ports	4
Warranty	5 Years From Shipment Date

All specifications are average and are subject to change without notice.
All performance specifications are based on testing conducted in Jamestown, PA USA,
At an elevation of 1,058 feet above sea level at ambient temperature conditions.

SHIPPING INFORMATION	
Proper Shipping Name	Ammunition Smoke
UN Number	0303
Hazard Class	1.4G
Labels Required	Explosive 1.4G
Quantity Per Package	28 Grenades
Total Package Weight	32 lb.
Package Type	UN Specification 1A2/Y36/S Metal Drum with Lever Lock Lid
Package Dimensions	19 x 12 (7gal. Drum also used for overnight packages)
Net Explosive Weight	510 gm per unit

CAUTION: Do not use this grenade indoors. The HC formulation produces a very dense smoke from a metallic composition that displaces air and has a high toxicity.

CTS is a Division of Combined Systems, Inc.
388 Kinsman Rd.
Jamestown, PA 16134 USA
TEL (724) 932-2177
FAX (724) 932-2166
EMAIL Sales@combinedsystems.com
www.combinedsystems.com