


PRODUCT SPECIFICATIONS

MODEL No.	DESCRIPTION:	
2300	12GA Inert Liquid Barricade	
2320	12GA CN Liquid Barricade	
2330	12GA CS Liquid Barricade	
2340	12GA OC Liquid Barricade	
		Revision E 5/21

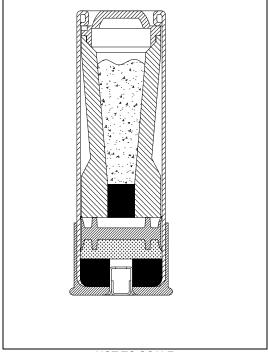

NOT TO SCALE

WARNING: CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, if used incorrectly, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

PHYSICAL & OPERATIONAL		
Туре	Barricade Penetrating Munitions	
Caliber	12 GA	
Weapon Compatibility	Cylinder Bore, 18" Barrel Minimum	
Cartridge Length	2.40" (60.9mm)	
Effective Range*	50 Yards (45 M)	
Muzzle Velocity	650-750 ft./sec	
Discharge Time	Instantaneous	
Warranty	5 Years from Shipment Date	

*Effectiveness is dependent upon the type of weapon, angle of impact, environmental conditions, and the type of the intermediate barrier. The greatest probability for penetration occurs when the projectile impacts 90° perpendicular to the intermediate barrier. General usage in tactical situations involves intermediate barriers, such as single pane exterior windows, non-tinted vehicle windows, and interior hollow core doors.

All specifications are average and are subject to change without notice.

All performance specifications are based on testing conducted in Jamestown, PA USA,

At an elevation of 1,058 feet above sea level at ambient temperature conditions.

SHIPPING INFORMATION		
Proper Shipping Name	2300 – Ammunition, Practice	
	2320,2330,2340 – Ammunition, Smoke	
UN Number	Model 2300- UN0362 , 1.4G	
	Models 2320, 2330, 2340 – UN0303, 1.4G	
Hazard Class	1.4G	
Labels Required	Explosive	
Quantity Per Package	5 Cartridges in Sealed Bag	
Total Package Weight	30 lb	
Package Type	UN Specifications 1A2/Y36/S Metal Drum	
	with Lever Lock Lid	
Package Dimensions	19x12 (7 gal. drum)	

CAUTION: These less-lethal munitions are designed for specific tactical situations. One must be trained specifically in the deployment of barricade penetrating munitions and exercise extreme care and caution to minimize the possibility of this projectile striking a human opposite the barrier.







