


MODEL No.	DESCRIPTION:
3400	37MM Muzzle Blast, 8" Long
3420	37MM CN Muzzle Blast, 8" Long
3430	37MM CS Muzzle Blast, 8" Long
3440	37MM OC Muzzle Blast, 8" Long
Revision E 5/21	

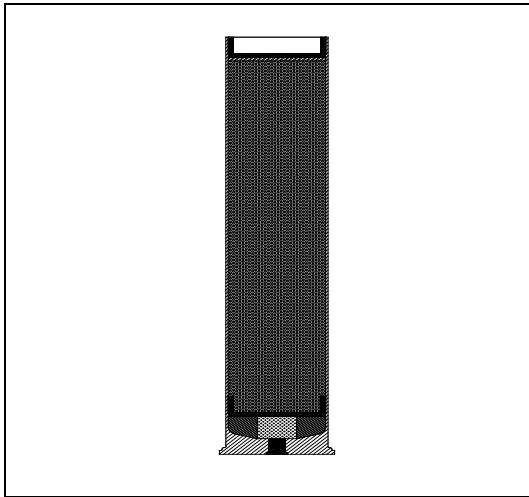

NOT TO SCALE

**WARNING:** CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, if used incorrectly, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

PHYSICAL & OPERATIONAL	
Type	Powder Blast Dispersion Munitions
Caliber	37MM / 40MM
Weapon Compatibility	37MM 1.5" Riot Guns / M79 Type Grenade Launcher
Cartridge Length	8.0" (203 mm)
Effective Range*	10-30 Feet (3-9M)
Muzzle Velocity	N/A
Discharge Time	Instantaneous
Warranty	5 Years From Shipment Date
<p>All specifications are average and are subject to change without notice. All performance specifications are based on testing conducted in Jamestown, PA USA, At an elevation of 1,058 feet above sea level at ambient temperature conditions.</p>	

SHIPPING INFORMATION	
Proper Shipping Name	Cartridges for Weapons Blank Ammunition, Smoke
UN Number	Model 3400 – UN 0338 Models 3420, 3430, 3440 – UN 0303
Hazard Class	Model 3400 - 1.4C Models 3420,3430,3440 - 1.4G
Labels Required	Explosive
Quantity Per Package	64 Cartridges
Total Package Weight	32 lb.
Package Type	UN Specification 1A2/Y36/S Metal Drum with Lever Lock Lid
Package Dimensions	19 x12 (7 gal. drum) Also used for overnight packages

\*Effective range is dependent upon environmental factors, especially wind. Operators should ensure that the wind or even a breeze is at their back prior to deployment.