


MODEL No.	DESCRIPTION:
4320	40MM CN Liquid Barricade, Spin Stabilized
4330	40MM CS Liquid Barricade, Spin Stabilized
4340	40MM OC Liquid Barricade, Spin Stabilized
	Revision E 10/18

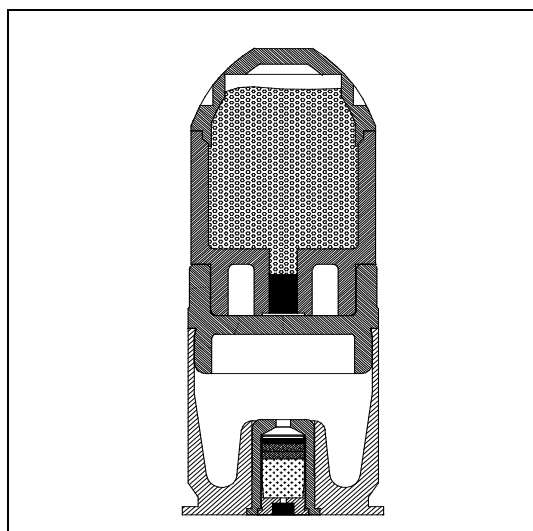

NOT TO SCALE

WARNING: CSI manufactures a variety of CTS less lethal products which are under pressure, pyrotechnic, incendiary, emit projectiles, generate smoke, or are explosive in nature. When used in accordance with CTS training guidelines and the individual agency's policy, they are intended to cause varying degrees of pain and injury, which are temporary. These products are restricted to law enforcement, corrections, and military personnel and are used to gain compliance, disperse crowds, restore order, or temporarily incapacitate dangerous persons. In rare circumstances, if used incorrectly, CTS less-lethal products may cause damage to property, serious bodily injury or death. Therefore, any person using the force option depicted on this page should receive proper training to ensure the safest and most effective use.

PHYSICAL & OPERATIONAL	
Type	Barricade Penetrating Munitions
Caliber	40MM
Weapon Compatibility	All 40MM Launchers, M203, M79 and Multi-Launcher Type
Cartridge Length	4.1" (104.14 mm)
Effective Range*	50 Yards (45 M)
Muzzle Velocity	400-425 ft./sec
Discharge Time	Instantaneous on Impact
Warranty	5 Years from Shipment Date
<p>All specifications are average and are subject to change without notice. All performance specifications are based on testing conducted in Jamestown, PA USA, At an elevation of 1,058 feet above sea level at ambient temperature conditions.</p>	

SHIPPING INFORMATION	
Proper Shipping Name	Ammunition Smoke
UN Number	0303
Hazard Class	1.4G
Labels Required	Explosive 1.4G
Quantity Per Package	96 Cartridges
Total Package Weight	45 lb.
Package Type	Drum UN1A2/Y36/S
Package Dimensions	19 x 12 (7 gal. drum) also used for overnight packages
Net Explosive Weight	0.52 gm per unit

*Effectiveness is dependent upon the type of weapon, angle of impact, environmental conditions, and the type of the intermediate barrier. The greatest probability for penetration occurs when the projectile impacts 90° perpendicular to the intermediate barrier. General usage in tactical situations involves intermediate barriers, such as single pane exterior windows, vehicle windows, pressed wood particle doors, 1-2 layers of wallboard, and interior hollow core doors.

CAUTION: These less-lethal munitions are designed for specific tactical situations. One must be trained specifically in the deployment of barricade penetrating munitions and exercise extreme care and caution to minimize the possibility of this projectile striking a human opposite the barrier.